

Single Point of Wall-mounted Gas Alarming Detectors

Our product has widely used in detecting toxic and harmful gas or oxygen content detection in metallurgy, chemical industry, petroleum, pharmaceutical, environmental industries and other work environment With imported sensors, high precision and strong anti-interference ability, long service life.

LED display, sound and light alarm

Intelligent design, simple operation, easy calibration, zero and alarm settings,

Can be output relay control signals.

Metal shell, solid and durable, easy to install.




Sound and Light Alarm



LED Display



Metal Shell

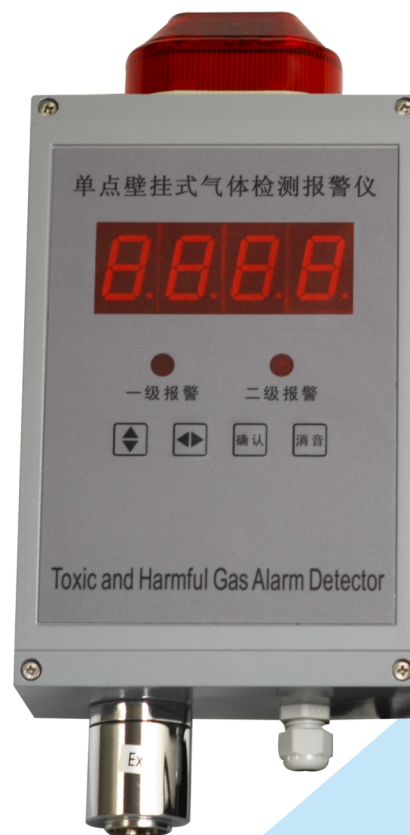

Basic parameters

Size : 324 mm * 154 mm * 82 mm

Weight : 2100 g

Sensor type : selectrochemistry method (Gas catalytic combustion type, special separately)

Destination gas : oxygen (O₂), gas (EX), Toxic or harmful gases (CO, H₂S, NH₃, CL₂, etc.)

Response time : ≤30s(O₂);≤40s(CO);≤20 s (EX)

Display : High brightness red digital tube

Alarm : More than 90 dB alarm wayvoice alarm (10 cm away from the detector measurement data)

Light alarm for the LED warning light

Output control : relay output (AC220V5A), signal control (switch) (optional: 4-20 mA current signal output)

Working pattern : continuous work

Working voltage : AC220V 50 Hz

Temperature range : Minus 20 °C to 50 °C

Humidity : 15% ~ 90% RH (No condensation)

Installation method : wall-mounted installation

